


Strainer with flange connection,
for water, steam and heat transfer oil
Filter screen: made of alloy steel wire,
if desired with supporting basket
(from DN 200 onwards standard equipment)
and/or fein screen (mesh size 0,25 mm)
Body: GGG 40.3, PN 16
Flanges acc. to DIN 2533

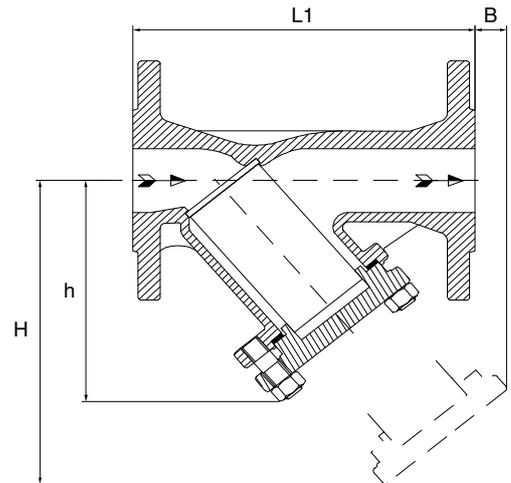

Order text:

Strainer GGG 40.3, PN 16, DN . .
filter screen made of alloy steel,
Flanges acc. to DIN
List-No. 150 4 . .

Max. operating pressure:

by:	120	200	250	300	350	°C
PN 16	16	13	13	13	10	bar

DN	List-No.	Weight kg	Immersion length L	Height opened h H	Measure B	Screen Ø x height	Wire gauge x mesh size
15	150 400	3,5	130	90 135	10	23 x 57	0,5 x 1
20	150 401	4	150	100 150	10	28 x 69	0,5 x 1
25	150 402	5,5	160	115 180	25	36 x 83	0,5 x 1
32	150 403	7	180	125 205	35	42 x 99	0,5 x 1
40	150.404	9	200	150 235	45	50 x 115	0,5 x 1
50	150 405	12	230	160 250	45	61,5 x 120	0,5 x 1
65	150 406	16	290	180 285	25	78,5 x 135	0,63x1,25
80	150 408	21	310	215 330	40	89,5 x 150	0,63x1,25
100	150 410	28	350	235 365	55	109,5 x 170	1,0 x 1,6
125	150 412	41	400	275 425	65	137,5 x 200	1,0 x 1,6
150	150 415	58	480	305 480	50	160 x 225	1,0 x 1,6
200	150 420	115	600	390 610	80	210 x 285	1,0 x 1,6